


T/P	
Pin Assignment	
1	TOP
2	RIGHT
3	BOTTOM
4	LEFT

- 1.Operation Temperature:-10° C~+50° C
- Storage Temperature:-20° C~+60° C
- 2.Life Cycle: >1,000,000 times
- 3.Linearity: ≤1.5%
- 4.ITO Film:Anti-Glare Hard Coated & Anti-Newton Ring(Oike film)  
Sheet Resistance: 400±50 Ω;  
ITO Glass: Sheet Resistance: 500±50 Ω
- 5.Tail Type :FPC Gold Plated
- 6.All Tolerances Not Marked:±0.3



REV	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-057F-4W-NA01B	CUSTOMER APPROVED	NOTE
1		DRAWN	STEVE	ISSUE DATE	2010/05/28			
2		CHECK	MIKE	SCALE	-/-			
3		APPROVED	SCOTT		CUSTOMER ID	GTOUCH		

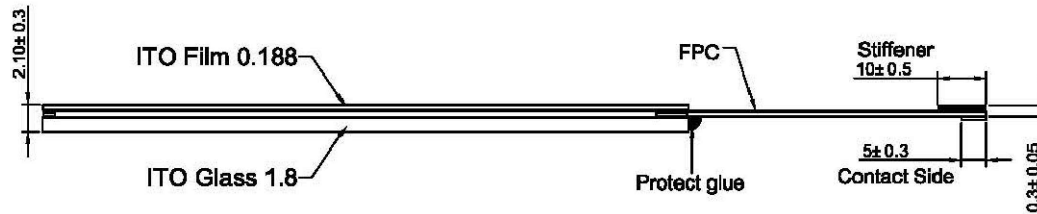

坤巨資訊股份有限公司  
Groovy Technology Corp.