





Connector Pinout	
Pin NO.	Designation
1	UL
2	UR
3	SG
4	LL
5	LR



HOUSING

NOTES:

- Optical Specifications:
 - Transparence: 80±3%
 - Haze: 8±3% (Anti Glare)
- Electrical Specifications
 - Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - Voltage endurance DC 50V/60sec.
 - Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - Insulation resistance ≥ 20MΩ/25VDC

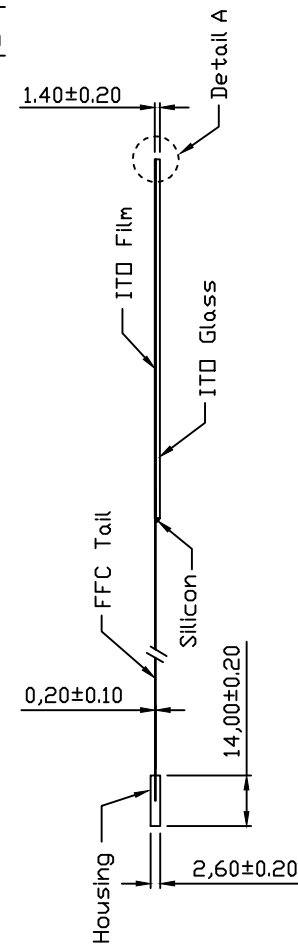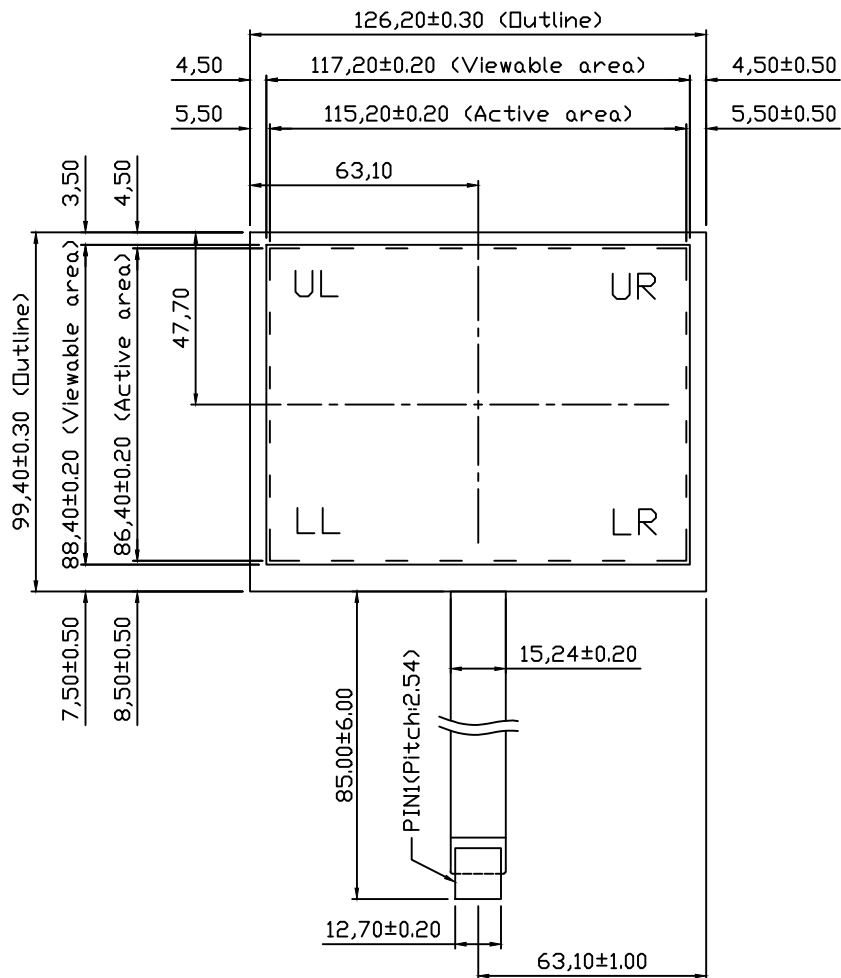

Detail A

ITD Film 0.188mm
Adhesive 0.06mm
ITD Glass 1.1mm

REV.	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-057F-5M-NB01A	CUSTOMER APPROVED	NOTE
1			DRAWN	SCOTT	ISSUE DATE	2017/09/22		
2			CHECK	HANK	SCALE	-/-		
3			APPROVED	GERALD	CUSTOMER ID			



坤巨資訊股份有限公司
Groovy Technology Corp.