

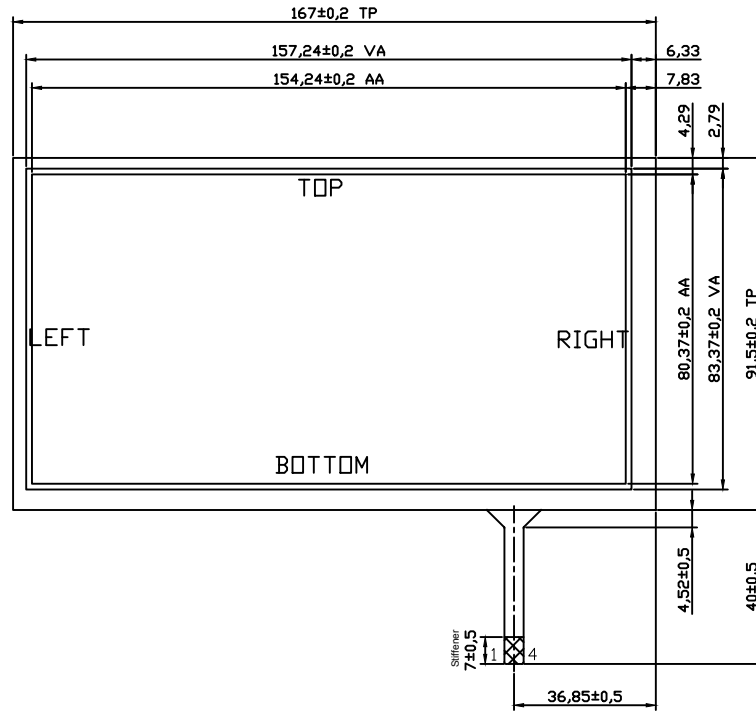
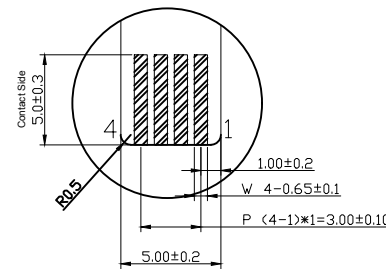


Front View

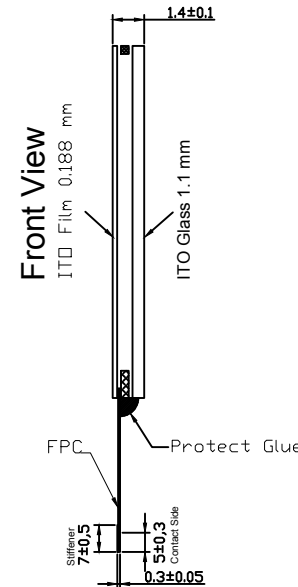

Back View

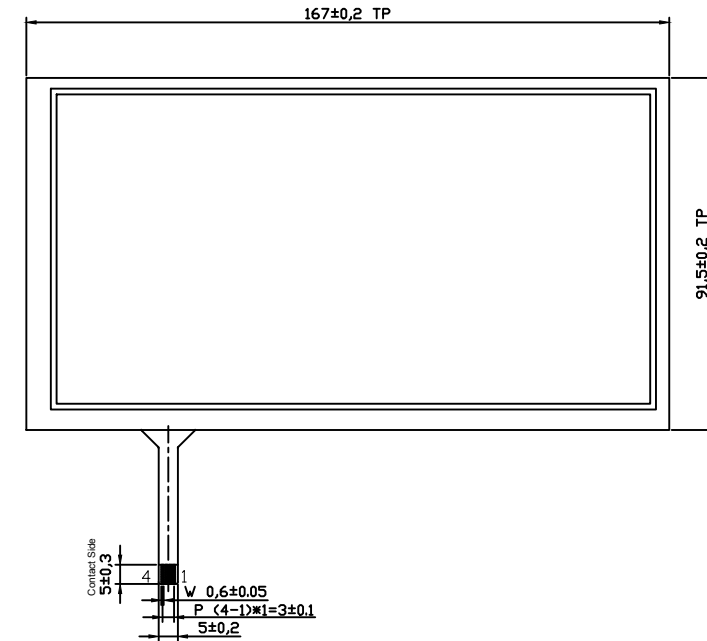

Detail A
Scale 4:1

T/P	
Pin	Assignment
1	Left
2	Bottom
3	Right
4	Top

Notes:

- 1.Type : Film/Glass/fpc tail
- 2.Rated Voltage: 5V 1mA
- 3.Insulation Resistance: $>20M\Omega$ (DC 25V)
- 4.Linearity: $<1.5\%$
- 5.Operation Force: 30~150g
- 6.Transparency: $>85\%$
- 7.Hitting Durability: $>1000k$
- 8.Chattering: $<15ms$
- 9.Operation Temperature: $-20\sim70^{\circ}C$
- 10.Storage Temperature: $-30\sim80^{\circ}C$ (Tovobo ITO Film)
 $-35\sim85^{\circ}C$ (Oike KA Type ITO Film)

REV	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-070F-4M-NA03A	CUSTOMER APPROVED	NOTE
1		DRAWN	STEVE	ISSUE DATE	2013/03/26			
2		CHECK	MIKE	SCALE	-/-			
3		APPROVED	SCOTT	CUSTOMER ID	GTOUCH			



坤巨資訊股份有限公司
Groovy Technology Corp.