

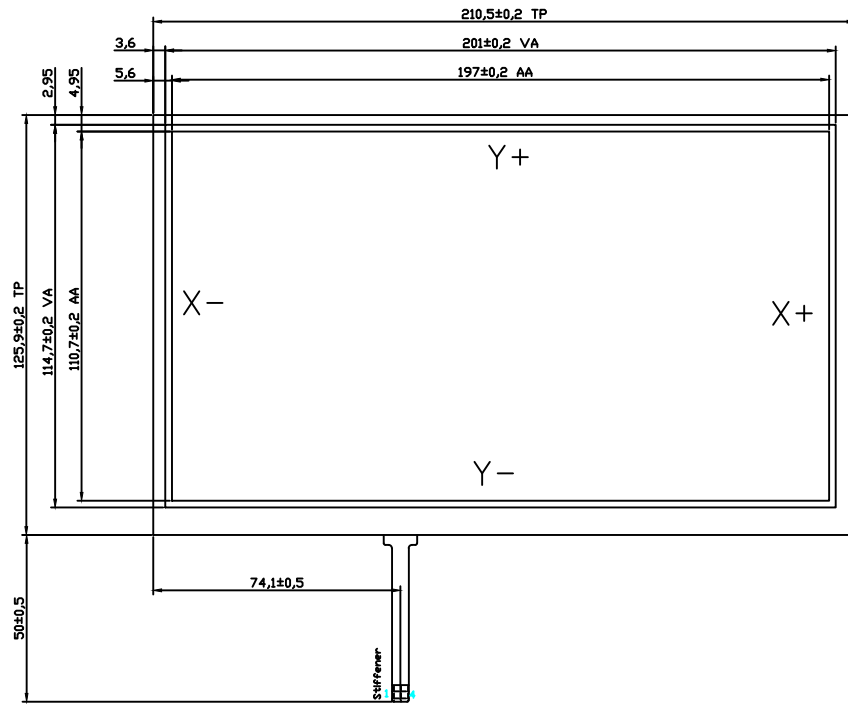


Front View

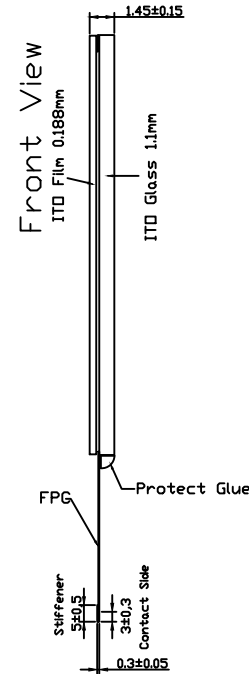

Back View

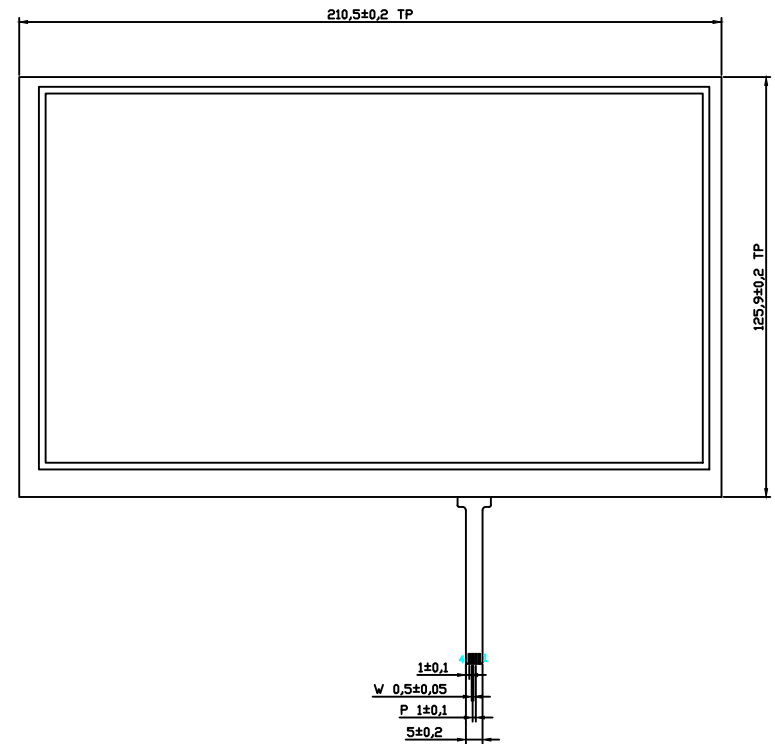

- Notes:
- 1.Type : Film/Glass/fpc tail
  - 2.Rated Voltage: 5V 1mA
  - 3.Insulation Resistance: >20MΩ(DC 25V)
  - 4.Linearity:<1.5%
  - 5.Operation Force: 30~150g
  - 6.Transparency:>85%
  - 7.Hitting Durability:>1000k
  - 8.Chattering:<15ms
  - 9.Operation Temperature: -20~70
  - 10.Storage Temperature: -30~80 (Toyoko ITD Film)  
-35~85 (like KA Type ITD Film)

PIN #	Assignment
1	Y+
2	X-
3	Y-
4	X+

REV	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-090F-4M-NA01A	CUSTOMER APPROVED	NOTE
1		DRAWN	STEVE	ISSUE DATE	2013/03/11			
2		CHECK	MIKE	SCALE	-/-			
3		APPROVED	SCOTT	CUSTOMER ID	GTOUCH			



坤巨資訊股份有限公司  
Groovy Technology Corp.