

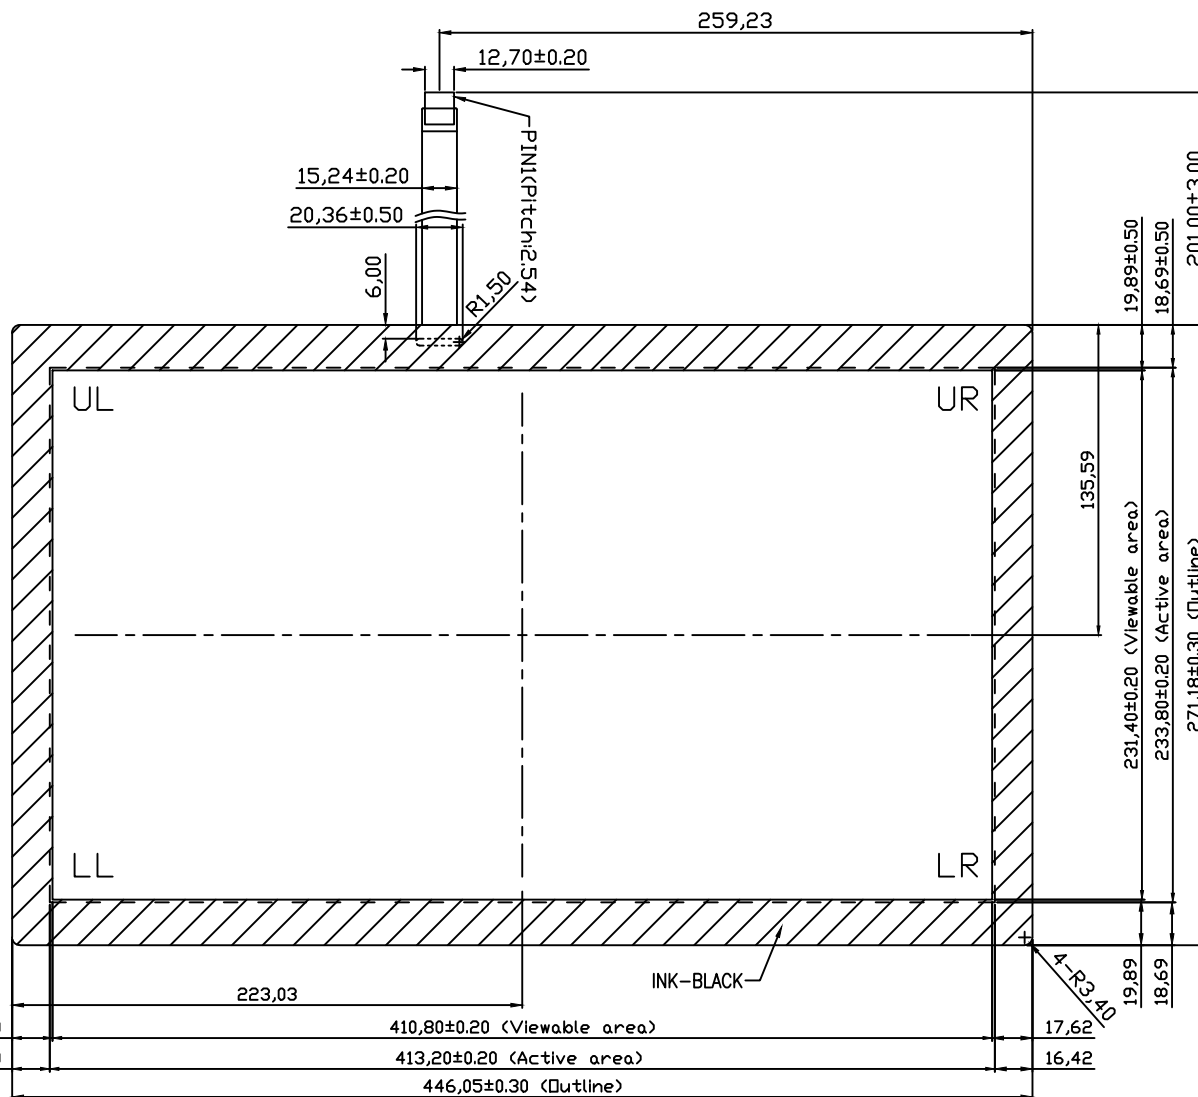
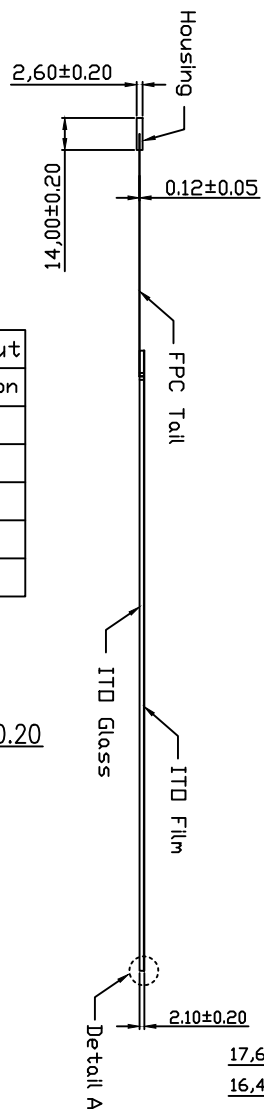


Connector Pinout	
Pin NO.	Designation
1	UR
2	LR
3	SG
4	UL
5	LL



TOP VIEW



Detail A

KA500PS1-188-MN3
Adhesive 0.08mm
ITD Glass 1.8mm

NOTES:

- Optical Specifications:
 - 1.1 Transparency: 80±3%
 - 1.2 Haze: 10±3% (Anti Glare)
- Electrical Specifications:
 - 2.1 Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - 2.2 Voltage endurance DC 50V/60sec.
 - 2.3 Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - 2.4 Insulation resistance ≥ 20MΩ/25VDC
- Operating Force ≤ 50g

REV.	DATE	REVISED	DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GP-185F-5N-NT03B	CUSTOMER APPROVED	NOTE
1			DRAWN	RYAN	ISSUE DATE	2018/09/03			
2			CHECK	SCOTT		SCALE	-/-		
3			APPROVED	JOSH		CUSTOMER ID			



坤巨資訊股份有限公司
Groovy Technology Corp.